GLOBALSAT GPS Dongle

Hardware Data Sheet

Product No: ND-105C

Version 1.0





Globalsat Technology Corporation

16F., No. 186, Jian-Yi Road, Chung-Ho City, Taipei

Hsien 235, Taiwan

Tel: 886-2-8226-3799 Fax: 886-2-8226-3899

E-mail: service@globalsat.com.tw
Website: www.globalsat.com.tw

Issue Date	APPR	CHECK	PREPARE
2013/11/15	Ray		Mason



Product Description

Product Description

ND-105C features high GPS sensitivity, Micro USB interface, low power consumption and ultra small form factor. This product is powered by MTK GPS solution; it can provide you with superior sensitivity and performance even in urban canyon and dense foliage environment. ND-105C supports up to 210 PRN channels. With 66 search channels and 22 simultaneous tracking channels, ND-105C acquires and tracks satellites in the shortest time even at indoor signal levels. Through ND-105C's excellent low-power consumption characteristic, while using power sensitive devices, especially portable applications. ND-105C PCBA with a simple ID design is suitable for the following device accessory:

- Smart Phone
- Tablet PC
- Portable device


Product Features


- MediaTek high performance GPS Chipset
- Very high sensitivity (Chip Tracking Sensitivity: -165 dBm)
- Extremely fast TTFF (Time To First Fix) at low signal level
- Micro USB interface.
- Built-in LNA
- Built-in GPS Antenna
- Built-in GPS status LED(Red).
- Built-in Back up Battery.
- Compact size (30.4 mm x 15.4 mm x 4.5 mm) suitable for portable application
- Very low power consumption
- Support NMEA0183 V4.0(GGA,GSA,GSV,RMC)
- Support SBAS (WASS, EGNOS, MSAS, GAGAN), QZSS
- Micro USB Supports Android & Window8 operating system.



Product Appearance









Electrical Specification

Absolute Maximums Ratings

Parameter	Min.	Тур.	Max.	Conditions	Unit
POWER Supply					
Main power supply(VCC)	4.5	5.0	5.5		V
power consumption		35			mA
Back up Battery consumption	6.7	6.9	7.2		uA
RF					
Operating Frequency		1.575			Ghz

Environmental Characteristics

Parameter	Min	Тур	Max	Unit
Humidity Range	5		95	% non-condensing
Operation Temperature	-20	25	60	$^{\circ}\mathbb{C}$
Storage Temperature	-40		85	$^{\circ}\mathbb{C}$




Receiver Performance

Sensitivity	Chipset Tracking: Chipset Autonomous acquisition:	-165dBm -148 dBm	
	Cold Start – Autonomous	< 35s	
Time-To-First-Fix	Warm Start – Autonomous	< 35s	
	Hot Start – Autonomous	< 1s	
Horizontal Position Accuracy	Autonomous	< 3m (2D RMS)	
Honzoniai i osilion Accuracy	SBAS	<2.0m	
Velocity Accuracy	Speed	< 0.01 m/s	
velocity Accuracy	Heading	< 0.01 degrees	
Reacquisition	0.1 second, average		
NMEA Update Rate	1 Hz(GGA,GSA,GSV,RMC)		
Maximum Altitude	< 18,000 meter		
Maximum Velocity	< 515 meter/ second		
Maximum Acceleration	< 4G		



Physical Characteristic

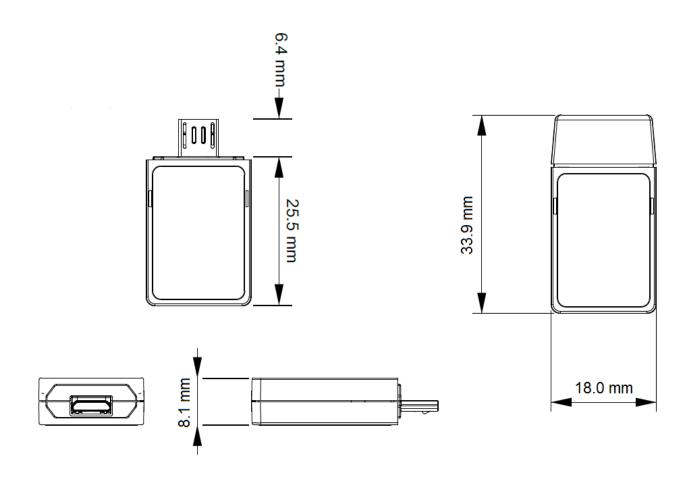

Туре	Micro USB GPS Dongle
Dimensions	30.4 mm * 15.4 mm * 4.5 mm ±0.2mm



Globalsat WorldCom Corporation 16F., No.186, Jian 1st Rd. Zhonghe Dist., New Taipei City 23553 Taiwan

16F., No.186, Jian 1st Rd. Zhonghe Dist., New Taipei City 23553 Taiwan
Tel: 886-2-82263799 Fax: 886-2-82263899 Web: www.globalsat.com.tw

RoHS / Lead Free Compliance

Dear Sales:

This letter is intended to answer questions you may come across regarding the compliance of Globalsat WorldCom Corporation products with the following European Directive 2011/65/EU (RoHS):

 Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment (RoHS).

This Directive aim is to avoid or limit the use of hazardous material compliant and meet the Standard by July.16,2011 of less than "0.1% by weight per homogeneous material for lead,hexavalent chromium,mercury, PBB and PBDE and 0.01% by weight and per homogeneous material for cadmium".

Globalsat has incorporated the requirement of 2011/65/EU into the product / technology development roadmaps and is committed to make lead free / RoHS fully compliant product available for shipment by July 16,2011.

Kevin Tan

Quality Assurance Manager

Prince Cheng

Chief Executive Officer (CEO)



Reversion history

Reversion	Date	Name	Status / Comments
V1.0	20131115	Mason	Initial Version